



UPGRADE
PACKAGING INDUSTRIES


ABOUT US

UPGRADE PACKAGING INDUSTRIES

is a name of innovative and reliable packaging machinery solutions for a diverse range of industries,

including food and beverage, pharmaceuticals, automobile and consumer good etc.

We specialize in supplying high performance **machines** and **services** that optimize efficiency, reduce costs, and enhance product integrity.

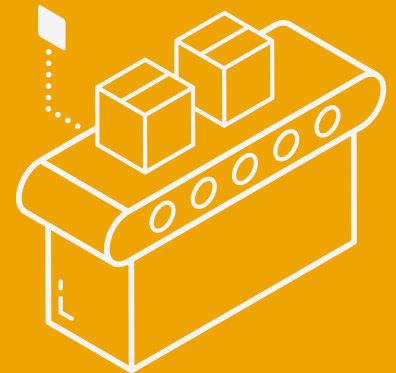

**Packaging Machine
&
Consumable**



STRAPPING MACHINES

HEAVY DUTY MODEL



**SEMI-AUTOMATIC
STRAPPING MACHINE**




**FULLY-AUTOMATIC
STRAPPING MACHINE**

Strapping Force (tension):	0-55 Kgf	Arch Size:	800W x 600H mm (Non Standard)
Strap Width:	8-15 mm	Power Supply:	3 ϕ
Strapping Speed:	1.5 Sec / Strap	Strap Cycle Speed:	27 cycles per/min
Min. Strapping Size:	60 mm(W) x 30 mm (H)	Tension Strength	Max. 70 Kgs
Max. Strapping Size:	Not Stipulated	(Adjustable-Mechanically)	
Machine Weight:	110 Kgs & 90 Kgs	Strap Width:	9/12
Power Supply:	1 Phase, 220 V, 50 Hz, 350W	Sealing Method:	Heat Sealing
Machine Dimension (LxWxH):	900mm x 580mm x 750mm	Table Height:	805mm
		Control:	PLC & PCB Controlled

REGULAR DUTY MODEL




**SEMI-AUTOMATIC
STRAPPING MACHINE**

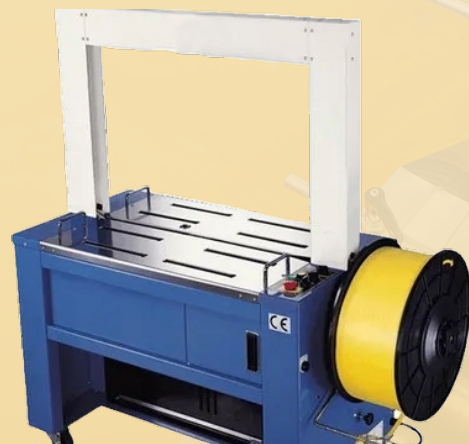

**FULLY-AUTOMATIC
STRAPPING MACHINE**




STRAPPING MACHINES

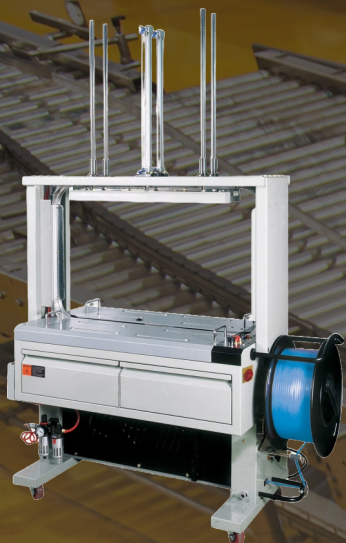

FULLY-AUTOMATIC STRAPPING MACHINE WITH COMPRESSED

Arch Size:	800W x 600H mm (Non Standard)
Power Supply:	3 ϕ , 380v
Strap Cycle Speed:	27 cycles per/min
Tension Strength (Adjustable-Mechanically)	Max. 70 Kgs
Strap Width:	9/12
Sealing Method:	Heat Sealing
Table Height:	805mm
Control:	Controlled PLC

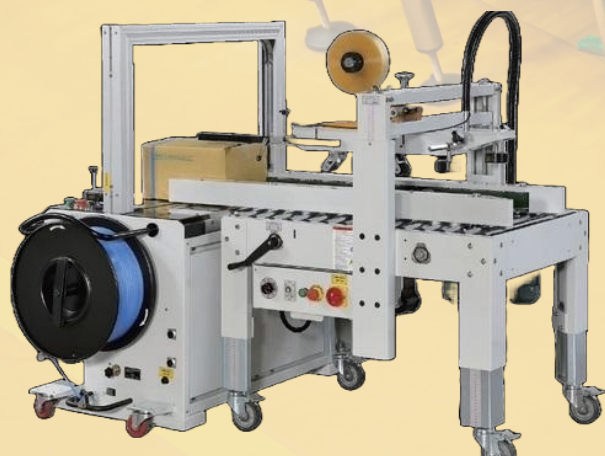

AUTOMATIC TAPING/STRAPPING COMBO MODEL

Power Supply:	3 Ph.,415/440V, 50Hz, 1.50 Kwh
Strap Width:	9mm/12mm/15mm
Strap Thickness:	0.55mm-0.8mm
Tension Variable:	5-75 Kgs
Arch Size:	W 800mm x H 600mm
Tape Width(mm):	48/72
Sealing Method:	Heat Sealing
Carton Weight:	5-30 Kgs
Taping Belt Speed:	20 Mtrs./Min.
Packaging Speed:	4-8 Cartons / Mins.
Strapping/Taping table(H):	810-820mm
Controls:	PLC Controlled



AUTOMATIC ONLINE PACKAGING SYSTEM

Power Supply:	3 Ph.,415/440V, 50Hz, 1.50 Kwh
Strap Width:	9mm/12mm/15mm
Strap Thickness:	0.55mm-0.8mm
Tension Variable:	5-75 Kgs
Arch Size:	W 800mm x H 600mm
Tape Width(mm):	48/72
Sealing Method:	Heat Sealing
Carton Weight:	5-30 Kgs
Taping Belt Speed:	20 Mtrs./Min.
Packaging Speed:	4-8 Cartons / Mins.
Strapping/Taping table(H):	810-820mm
Controls:	PLC Controlled

CARTON SEALING MACHINE




Conveying Belt Speed:	20mtrs./ min.
Min. Carton Size:	150mm(W) x (150mm) (H) x 150(L).
Max. Carton Size:	500mm(W) 500mm (H)x No Bar (L)
Power Supply:	1 Phase 220v 50Hz 300W.
Working Height:	635mm-780mm (Manual Adjustable)
Width of Adhesive Tape:	48 & 72 (mm)
Machine Dimension(mm):	1105(L) x 785(W) x (950-1420)(H)
Weight:	1410Kg.

CARTON SEALING WITH AUTO FLAP CLOSER



Function:	Top and Side Drive.
Conveying Belt Speed:	20mtrs./min.
Min. Carton Size:	250mm(L)x150mm(W) x 150mm(H).
Max. Carton Size:	600mm x 500mm(W) x 500mm(H)
Power Supply:	1 Phase 220V 50Hz 240W
Working Height:	570mm-770mm(Adjustable)
Width of Adhesive Tape:	48/72(mm).
Machine Dimension(mm):	1250(L)x910(W) x(1315)(H)
Weight:	160Kg.
Compressed Air:	6 Kg/cm2

AUTOMATIC EDGE SEALING MACHINE

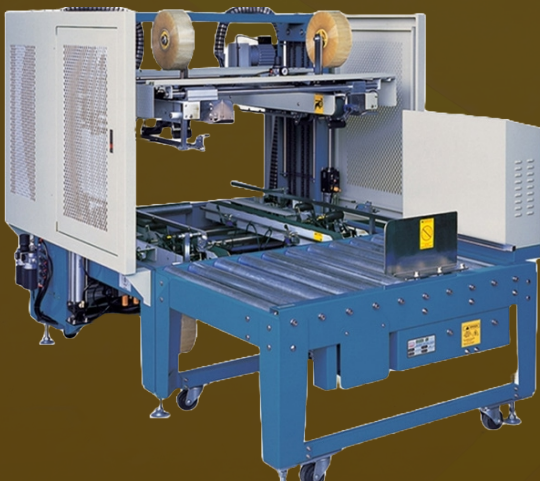

Function:	Top / Bottom Drive
Power:	1 Phase, 220V/240V, 50 Hz
Power Consumption:	1000W
Carton Size:	L320=800mm, W200-600mm, H180-600mm
Tape Width:	2" or 3" (according to customer's requirement)
Dimension:	2150x13650x1580
Speed:	5-10 carton/min. (depending upon carton's size & material)
Working Table Height:	650mm to 750mm
Compressed Air Requirement:	6Kg/cm2
Weight:	550 Kg

UPGRADE PACKAGING INDUSTRIES

Contact Us

Address: Chirdharpur Road, Chhaprola,
Greater Noida, Gautam Budh Nagar, U.P 201009

Email: sales@upgradepackaging.in
service@upgradepackaging.in
Contact Us: +91 98738 67776, +91 98735 67776
Website: upgradepackaging.in