



UPGRADE

PACKAGING INDUSTRIES




ABOUT US

UPGRADE PACKAGING INDUSTRIES

is a name of innovative and reliable packaging machinery solutions for a diverse range of industries,

including food and beverage, pharmaceuticals, automobile and consumer good etc.

We specialize in supplying high performance **machines** and **services** that optimize efficiency, reduce costs, and enhance product integrity.

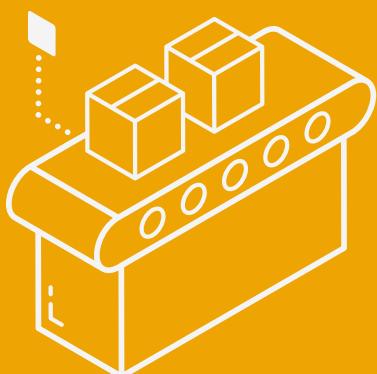

Packaging Machine
&
Consumable




WRAPPING MACHINE



CARTON STRETCH WRAPPING MACHINE

Turn Table Dia:	400x400mm
TT Speed:	3-20 RPM
Mast height:	700mm
Packing Height:	500mm
Power Pre Stretch Unit:	0-300%
Min. Package Size:	250mmx250mmx250mm
Max. package Size:	500mmx500mmx500mm
Weight Capacity:	100 Kgs (Max)
Power Consumption:	750W

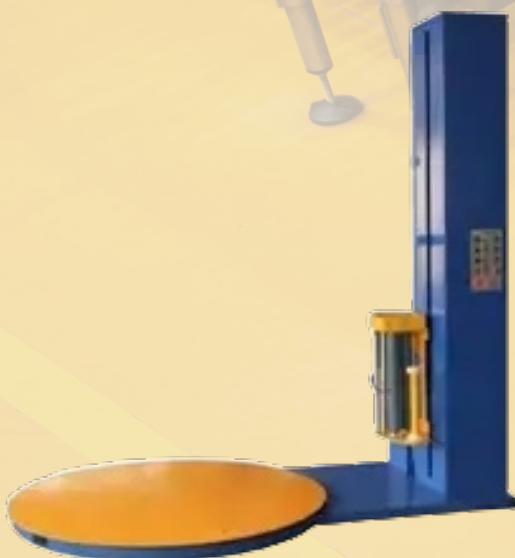

PALLET STRETCH WRAPPING MACHINE

Turn Table Dia:	1500x1500mm
TT Speed:	3-20 RPM
Mast height:	2400 mm
Packing Height:	2000 mm
Power Pre Stretch Unit:	0-300%
Max. package Size:	1500mm x1500mm x2000mm
Weight Capacity:	2000 Kgs (Max)
Power Consumption:	1.5 Kwh
Model:	PLC Model




CARTON STRETCH WRAPPING MACHINE ADVANCE

Turn Table Dia:	400x400mm
TT Speed:	3-20 RPM
Mast height:	1000 mm
Packing Height:	900 mm
Power Pre Stretch Unit:	0-300%
Max. package Size:	875mm X 875mmx875mm
Weight Capacity:	100 Kgs (Max)
Power Consumption:	1 Kwh
Model:	PLC Model



SEALING MACHINE

CONTINUOUS BAND SEALING MACHINE

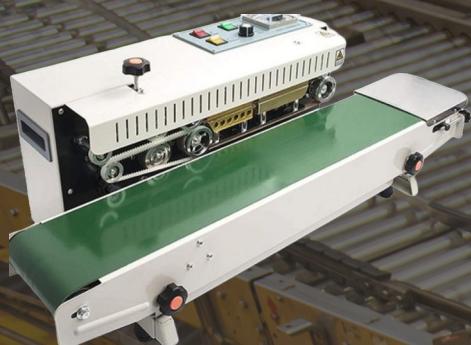

Power Supply:	1 Phase, 220V 50 Hz, 650W
Sealing Speed:	0-10 Mtrs. / Min.
Sealing Width:	8-10mm
Temperature Range:	0-200°C
Conveyor Size:	840mm x 180mm
Film Thickness:	<.8mm
Machine Dimension:	840x380x270

CONTINUOUS BAND SEALING MACHINE 10 Kg



Power Supply:	1 Phase, 220V, 50Hz, 1250W
Motor Power:	150W
Sealing Power:	550x2
Sealing Speed:	0-12 Mtrs./Min.
Sealing Width:	20mm
Temperature Range:	0-400°C
Double Heating Blocks	
Heavy Blower Fan for perfection	
Conveyor Loading:	1520mm x 250mm
Distance from Sealing Centre to Conveyor:	25 Kgs max. 100-700mm
Machine Dimension:	1550x650x1550

CONTINUOUS BAND SEALING MACHINE 5 Kg



Vertical Sealing with conveyor
Body MS Powder Coated
Power Supply: 1Phase, 220V, 50hz, 1000W
Sealing Speed: 0-10 Mtrs./Min.
Sealing Width: 8-10mm
Temperature Range: 0-300°C
Conveyor Size: 1200mm x 250mm
Conveyor Loading: 5-10 Kgs max.
Distance from Sealing Centre to Conveyor: 200-500mm

PET STRAPPING MACHINE
BATTERY



PET STRAPPING MACHINE
PNEUMATIC



Max Tape Thickness:

16x 1mm

Max Shrinking Force:

259 Kg

Dimension:

280 x 160 x 180mm

Weight:

3.9 Kg

Strap Quality:

Pet Strap

Max Tension:

2000 Nm

Joint Type:

Heat Seal

Friction

Weld Sealing


Battery Life:

2000 Chrging & Pneumatic

PET STRAPPING



CONSUMABLES

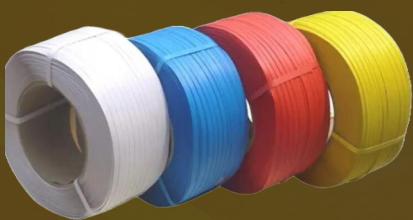

PP STRAP



BOPP TAPE



STRETCH FILM



POF SHRINK FILM



LDPE SHRINK FILM



PET STRAP

UPGRADE PACKAGING INDUSTRIES

Contact Us

Address: Ghirdharpur Road, Chhaprola,
Greater Noida, Gautam Budh Nagar, U.P 201009

Email: sales@upgradepacking.in
service@upgradepacking.in

Contact Us: +91 98738 67776, +91 98735 67776

Website: upgradepacking.in